


PowerScale

The three-phase UPS for low power applications

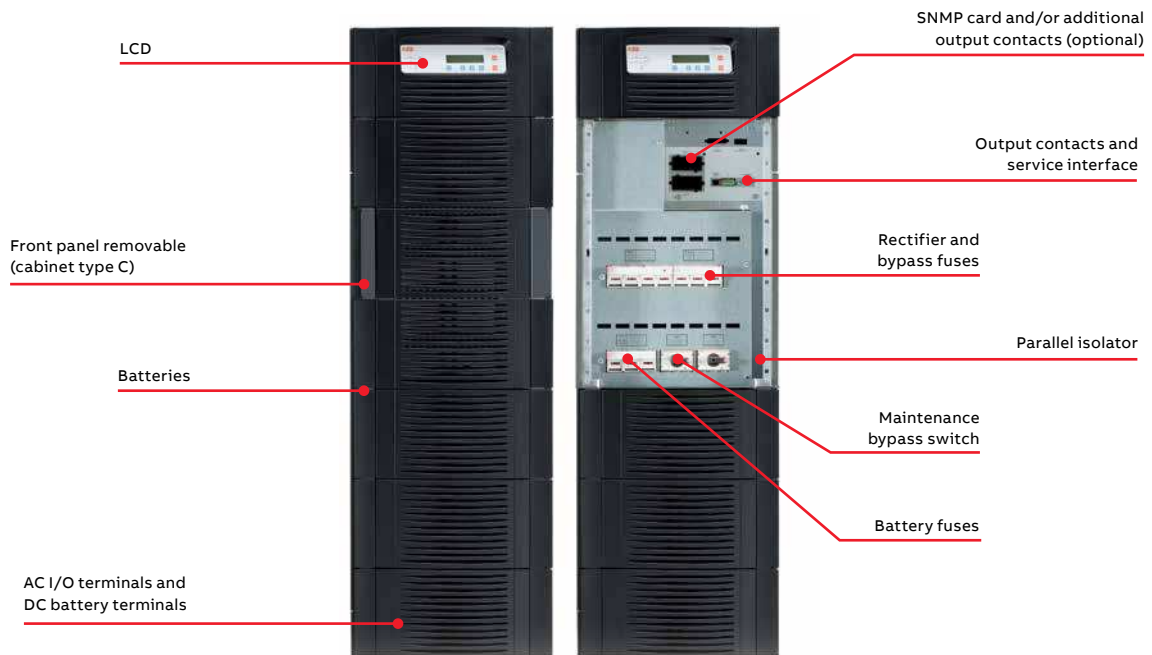

PowerScale is an online, double-conversion, VFI (voltage frequency independent) UPS that provides enhanced power protection in a compact format. Its outstanding price/performance delivers the best value for money in its category with

uncompromised system reliability and power availability. PowerScale is available in three cabinet sizes, enabling you to choose the ideal capacity and required autonomy for your critical load.

High reliability

- Online double conversion technology
- Parallelable systems for increased redundancy

Low cost of ownership

- Scalable power and autonomy time
- Small footprint/high power density
- High efficiency at partial and rated loads (up to 95.5%)
- Reduced installation costs
- Ripple-free and temperature controlled battery chargers extend battery life time performance
- Low input harmonic distortion (THDi <3%)

Flexible design


- Available in seven power ratings and three cabinet sizes
- Parallel capacity up to 20 units
- External battery cabinets for extended autonomy

Efficient service concept

- Manually operated maintenance bypass switch
- User-friendly LCD
- Ergonomic design for easy serviceability
- Remote monitoring and connectivity options

PowerScale

Available models

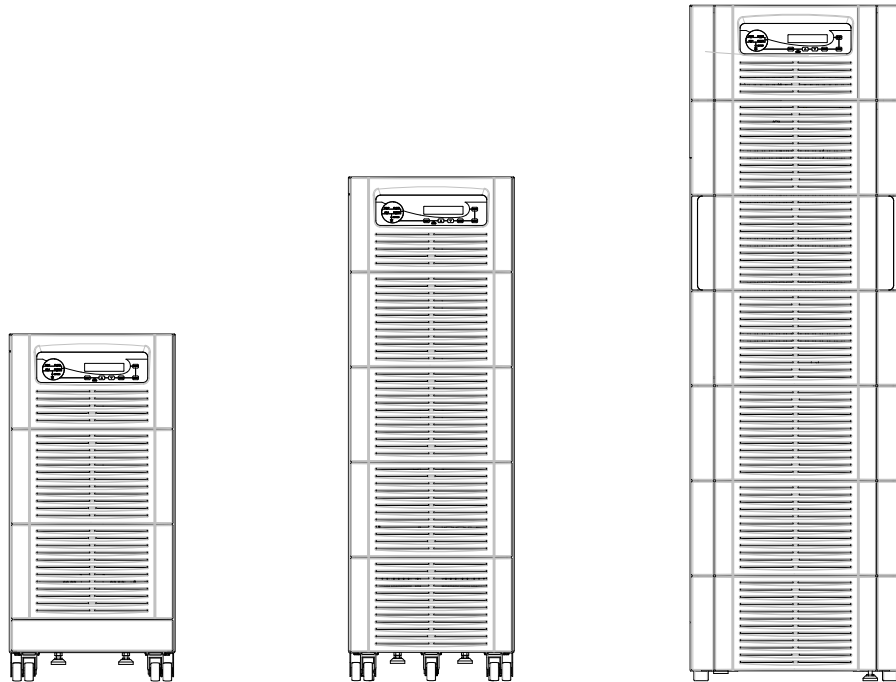

Cabinet type	Cabinet A: 10–20kVA	Cabinet B: 10–25kVA	Cabinet C: 25–50kVA
Dimension w × h × d	345 × 720 × 710mm	345 × 1045 × 710mm	440 × 1400 × 910mm
Internal battery capacity	Up to 48 blocks 7 / 9Ah	Up to 96 blocks 7 / 9Ah	Up to 144 blocks 7 / 9Ah or 48 blocks 24 / 28Ah

UPS cabinet configuration

- Online double conversion UPS
- Capacities from 10kVA to 50kVA in three different cabinet sizes
- Input, bypass and battery protection fuses
- Manual bypass switch
- Up to 95.5% efficiency across a wide load range
- Single- and dual-input feed available
- Communication interfaces: RS-232 and USB ports, I/O dry contacts (EPO, GEN On, ...)
- Free space to place internal batteries

Options

- Integrated back-feed protection
- Parallel kit
- Cold start
- IP21
- Halogen-free cabling
- Battery temperature sensor
- Communication interfaces: Relay card, ModBus RS-485, ModBus TCP/IP, SNMP
- Internal batteries
- External battery cabinets

PowerScale

Technical specifications

General data	10kVA	15kVA	20kVA	25kVA	30kVA	40kVA	50kVA
Output power max.	9 kW	13.5 kW	18 kW	22.5 kW	27 kW	36 kW	45 kW
Output power factor	0.9						
Topology	Online double conversion						
Parallel configuration	Up to 20 units in parallel configuration						
UPS type	Standalone						
Inbuilt batteries	Yes						
Input							
Nominal input voltage	3×380V/220V+N, 3×400V/230V+N, 3×415V/240V+N						
Voltage tolerance (referred to ×400V/230V)	For loads <100% (-10%, +15%), <80% (-20%, +15%), <60% (-30%, +15%)						
Input distortion THDi	≤3 at 100% (sine wave)						
Frequency	35–70Hz						
Power factor	0.99 at 100% load						
Output							
Rated output voltage	3×380 V/220 V+N, 3×400 V/230 V+N, 3×415 V/240 V+N						
Voltage tolerance (referred to ×400V/230V)	1% (static), 4% (dynamic)						
Voltage distortion	<2% linear load, <4% non linear load (IEC/EN62040-3)						
Frequency	50Hz or 60Hz						
Overload capability	5 min.:110 % or 20 sec.: 125 % (10 kVA - 25 kVA); 10 min.: 110 % or 1 min.: 125 % (30 kVA - 50 kVA)						
Unbalanced load	100% (all three phases regulated independently)						
Crest factor	3:1 (load supported)						
Efficiency							
Overall efficiency	Up to 95.5%						
In eco-mode configuration	98%						
Environment							
Storage temperature	-25 °C to +70 °C						
Operating temperature	0 °C to +40 °C						
Altitude	1000m without derating						
Battery							
Battery type	7 Ah/9 Ah/28 Ah, sealed, lead-acid, maintenance-free						
Battery replacement	Field-replaceable						
Battery voltage	Flexible voltage for longer backup times						
Battery capacity	48 or 96×7/9Ah	48 or 96×7/9Ah	48 or 96×7/9Ah	96 or 144×7/9Ah	144×7/9Ah or 48×28Ah	144×7/9Ah or 48×28Ah	144×7/9Ah or 48×28Ah
Communications							
LCD	Yes (per module)						
LEDs	LED for notification and alarm						
Communication ports	RS-232, SNMP slot (USB and potential-free contacts optional)						
Standards							
Safety	IEC/EN 62040-1						
Electromagnetic compatibility (EMC)	IEC/EN 62040-2						
Performance	IEC/EN 62040-3						
Product certification	CE						
Protection rating	IP20						
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001						
Weight, dimensions							
Cabinet type	A or B	A or B	A or B	B or C	C	C	C
Weight	60 or 88 kg	62 or 90 kg	64 or 92 kg	94 or 135 kg	145 kg	150 kg	155 kg
Dimensions w×h×d (mm)	345×720×710 or 345×1045×710	345×720×710 or 345×1045×710	345×720×710 or 345×1045×710	345×1045×710 or 440×1400×910	440×1400×910	440×1400×910	440×1400×910

—
abb.com/ups